



| | | | |
|---|---|---|----------------|
|  | ITTC – Recommended Procedures and Guidelines | 7.5-01 -01-01 Page 1 of 6 | |
| | Model Manufacture Ship Models | Effective Date 2002 | Revision 01 |

Table of Contents

| | |
|--|--|
| 1 PURPOSE OF PROCEDURE.....2 2 PARAMETERS.....2 2.1 Definition of Variables.....2 3 DESCRIPTION OF PROCEDURE.....2 3.1 Model Manufacture2 3.1.1 Hull Model2 3.1.2 Propeller Model.....3 3.1.3 Appendages.....4 | 3.2 Turbulence Stimulation.....4 3.2.1 Hull4 3.2.2 Appendages.....5 3.2.3 Propeller.....5 3.3 Preparation for Model Testing5 3.3.1 Ballasting and trimming (for resistance and self propulsion tests) 5 3.3.2 Wax models6 3.4 Documentation6 4 REFERENCES.....6 |
|--|--|

| | |
|--|----------------------------|
| Updated by | Approved |
| Specialist Committee: Procedures for Resistance, Propulsion and Propeller Open Water Tests of 23 rd ITTC 2002 | 23 rd ITTC 2002 |
| Date | Date 2002 |

| | | | |
|---|---|---|----------------|
|  | ITTC – Recommended Procedures and Guidelines | 7.5-01 -01-01 Page 2 of 6 | |
| | Model Manufacture Ship Models | Effective Date 2002 | Revision 01 |

Ship Models

1 PURPOSE OF PROCEDURE

The purpose of the procedure is to ensure the correct manufacture of hull and propeller models for Resistance, Propulsion and Propeller Open Water Tests.

The tolerances of propeller models for manoeuvring, sea keeping and ice tests can generally be larger (typically 1.5 to 2 times) than those used for propulsion or open water tests whilst those for cavitation tests may be smaller.

PARAMETERS

1.1 Definition of Variables

| | |
|-----------------|---|
| X, Y, Z | Coordinate directions |
| L_{PP} | Length between perpendiculars (X) (m) |
| L_{WL} | Length on waterline (X) (m) |
| B | Breadth (Y) (m) |
| T | Draught (Z) (m) |
| ∇ | Hull Displacement Volume (m ³) |
| Δ | Hull Displacement Mass (kg) |
| AP | After Perpendicular |
| FP | Forward perpendicular |
| A_E | Propeller expanded blade area (m ²) |
| A_0 | Propeller disk area (m ²) |
| D | Propeller diameter (m) |
| P | Propeller pitch (m) |
| p | Pitch–Diameter ratio (P/D) |
| a_E | Expanded blade area <i>ratio</i> (A_E/A_0) |
| t | Propeller section thickness (m) |
| c | Propeller chord or blade width (m) |
| Solidity Factor | Ratio of assumed 2-D rotor blade area / disk area |

2 DESCRIPTION OF PROCEDURE

2.1 Model Manufacture

2.1.1 Hull Model


General: The basic requirement is that the model should be geometrically similar to the ship wherever it is in contact with the water. This may not be possible in all cases owing to different systems and materials of construction on model scale and full size and it is desirable that any departures from similarity should be known and documented.

Materials and construction: Materials used for ship hull models include wax, wood, high density closed cell foam and fibre reinforced plastic (FRP). Models are normally cut from a lines plan re-drawn from the ship plan. The application of CAD/CAM processes allow the numerical representation of the hull from the drawing to the cut model. After cutting, the model is finished by hand. In the case of FRP construction, a foam or wooden plug of the model will be manufactured in a similar manner.

Surface finish: The model surface should be smooth and equivalent to that achieved with a 300 to 400 grit wet and dry paper.

Stations and waterlines: The spacing and numbering of displacement stations and waterlines should be properly defined. Displacement *sections* may be identified as follows:

- A ten section system numbering from aft with station 0 at the AP. The number of stations can also be 21 (20 equally sized

| | | | |
|---|---|---|----------------|
|  | ITTC – Recommended Procedures and Guidelines | 7.5-01 -01-01 Page 3 of 6 | |
| | Model Manufacture Ship Models | Effective Date 2002 | Revision 01 |

intervals). The stations are counted from aft.

- Decimal fraction stations may be introduced at the ends as required (such as 9.5, 9.6, 9.7 etc.).
- Stations aft of the AP to be numbered negatively.
- Stations forward of the FP to be numbered positively in natural succession (10.1, 10.2 etc.).

It should be noted that there are other methods of numbering the displacement stations which may be equally acceptable.

Waterlines are identified as follows:

- Waterlines should be spaced as required and identified by their height above the baseline.
- The baseline should be defined as the top-side of keel. In the case of a raked keel the baseline is parallel to the design waterline and midway between the height above base at the AP and FP stations.

Moulded dimensions: Ship lines are normally drawn to moulded dimensions and model hulls should also be constructed to moulded dimensions.

Manufacturing tolerances: Model hull tolerances for breadth (Y) and draught (depth) (Z) should be within ± 1.0 mm and for length should be within $\pm 0.05\%$ length or ± 1.0 mm whichever is the larger.

Openings: Openings in the hull should be manufactured to within ± 1.0 mm. Lateral thrust units should be modelled using an appropriate model of the thruster or a two-dimensional representation using an appropriate solidity factor.

Stability over time: The dimensions of the hull model should not move outside the recommended manufacturing tolerances. It should be noted that the dimensions of wax models can change appreciable with changes in temperature. For example, a change of 5°C may alter the length of a model by about 0.15% (10 mm for a 7 m model). The model documentation should include any changes in dimensions which may have arisen from this source.

2.1.2 Propeller Model

Manufacturing tolerances (for self propulsion and open water tests):

Propellers having diameter (D) typically from 150 mm to 300 mm should be finished to the following tolerances:

| | |
|--------------------------------------|------------------------------|
| Diameter (D) | ± 0.10 mm |
| Thickness (t) | ± 0.10 mm |
| Blade width (c) | ± 0.20 mm |
| Mean pitch at each radius (P/D): | $\pm 0.5\%$ of design value. |

Special attention should be paid to the shaping accuracy near the leading and trailing edges of the blade section and to the thickness distributions. The propeller will normally be completed to a polished finish. The use of CAD/CAM processes further enhance the facility to achieve such tolerances.

The manufacture of model ducts, vane wheels and pre and post swirl vanes should follow the tolerances recommended above for model propellers used in self propulsion and open water tests.

Gaps: The gap between the aft side of the model bossing and the fore side of the propeller boss should be the minimum required to allow sufficient forward movement of the propeller

when calibrating the thrust dynamometer but should not exceed 2 mm with the propeller in its design position. Rope guards across the gap should not be produced at model scale.

Propeller / hull clearances: Propeller/hull aperture clearances should have tolerances within ± 1.0 mm and a maximum axial propeller movement of 1.5 mm. These tolerances should provide propeller clearances with less than 1.0% D error.

2.1.3 Appendages

Appendages in this context refer to items such as external shaft brackets, open propeller shafts, bossings, the struts and pods of podded propulsors, bilge keels, roll fins and rudders.

- Appendages should be built to the full external shape as designed.
- The manufacturing tolerances of appendages should be within ± 0.2 mm.

- Surface finish should be at least as good as that recommended for the hull model.
- Appendages should be located within ± 0.5 mm of their design position.

2.2 Turbulence Stimulation

2.2.1 Hull

The model should be fitted with a recognised turbulence stimulator which should be clearly described in the model documentation and the report on the experiments. Suitable hull turbulence stimulators include studs, wires and sand grain strips. Figure 1, from Hughes and Allan (1951) and NPL Report 10/59 (1960), gives guidelines for the dimensions of studs and the location of the studs as turbulence stimulators on a raked stem of conventional type.

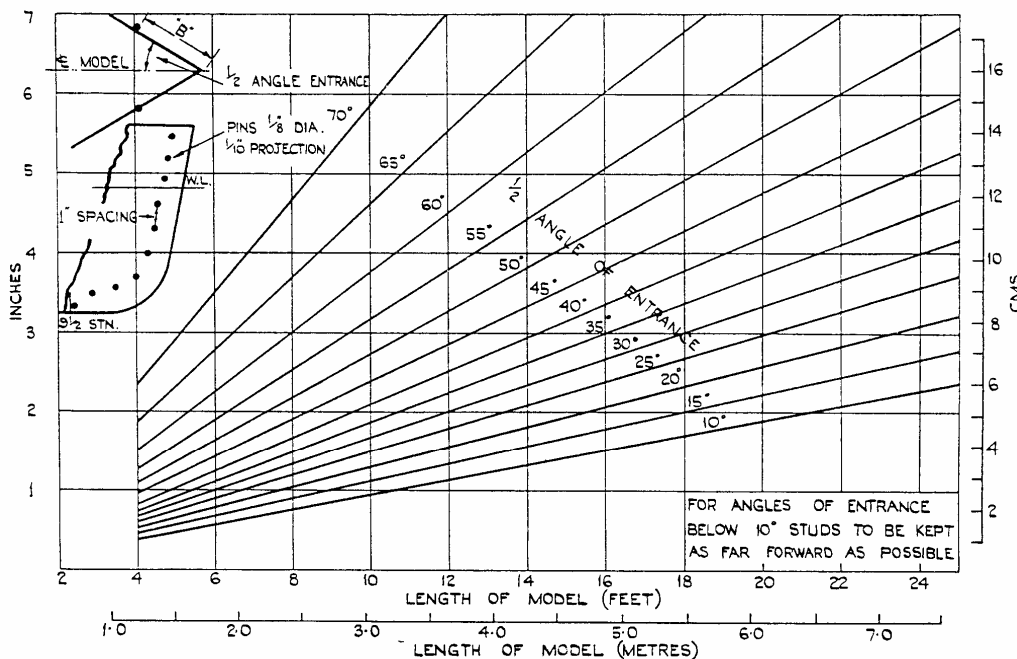


Figure 1 Location of studs as turbulence stimulators

Wires used for turbulence stimulation will be typically between 0.5 mm and 1.0 mm diameter, depending on position and model speed, and be situated about 5% L_{PP} aft of the FP.

Sand strips used for turbulence stimulation will typically comprise backing strips/adhesive of 5 mm to 10 mm width covered with sharp edged sand with grain size around 0.50 mm, with its leading edge situated about 5% L_{PP} aft of the FP.

A bulbous bow will additionally have turbulence stimulators situated typically at $\frac{1}{3}$ of the bulb length from its fore end.

2.2.2 Appendages

Turbulence stimulation should be applied to appendages when laminar flow over the appendage is likely. Suitable turbulence stimulators for appendages include studs, wires, sand strips and Hama strips. Figure 2 provides details of the Hama strip, which will be located near the leading edge of the appendage. Further details of the Hama strip and a discussion of its characteristics and applications, and the characteristics of other stimulators, may be found in ITTC (1990).

2.2.3 Propeller

Turbulence stimulation will not normally be applied to propellers used in self propulsion and open water tests. There is however evidence that turbulence stimulation may be necessary on model propellers used in cavitation tests.

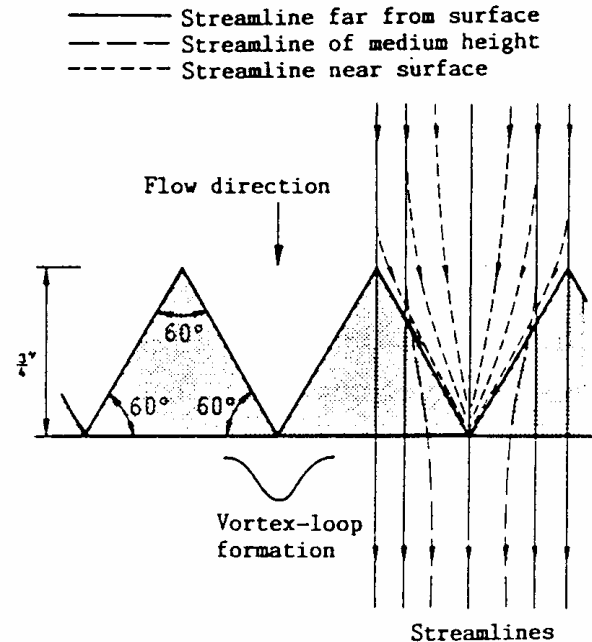



Figure 2 Details of Hama strips as turbulence stimulators

2.3 Preparation for Model Testing

2.3.1 Ballasting and trimming (for resistance and self propulsion tests)

The model should be loaded on displacement and not on draught and should be run within 0.2% of the correct calculated displacement. The trim of the model should be such that the errors in draught, if any, from the design figure are the same at the forward and after perpendiculars. The model will normally be tested without heel. The mean of the four draughts, fore perpendicular, after perpendicular, port side amidships and starboard side amidships, should be within 2.0 mm of the designed figure. Hog or sag deformation should not exceed acceptable tolerances, typically not > 2.0 mm. For older models being re-tested, the choice of an acceptable tolerance may depend on resistance benchmark re-tests.

| | | | |
|---|---|---|----------------|
|  | ITTC – Recommended Procedures and Guidelines | 7.5-01 -01-01 Page 6 of 6 | |
| | Model Manufacture Ship Models | Effective Date 2002 | Revision 01 |

2.3.2 Wax models

Before running, wax models should be left fully sunk in the water, preferably for 36 hours and not less than 12 hours. On re-floating, the entire surface should be cleaned in the tank water with a sponge or soft brush, particular care being taken to remove all air bubbles and slime from the surface. If the model has been in the water for some weeks and has become encrusted with a crystalline deposit it should be re-scraped and re-soaked, not merely sponged.

- Tolerances of manufacture

Propeller Model:

- Identification (model number or similar)
- Materials of construction
- Principal dimensions
 - Diameter
 - Pitch-Diameter Ratio (P/D)
 - Expanded blade Area Ratio (A_E/A_O)
 - Thickness Ratio (t/D)
 - Boss Diameter
- Tolerances of manufacture

2.4 Documentation

The particulars of the model(s) should be collated in a report and/or included in a test report, and should contain at least the following information:

Hull Model:

- Identification (model number or similar)
- Materials of construction
- Principal dimensions
 - Length between perpendiculars (L_{PP})
 - Length on waterline (L_{WL})
 - Breadth (B)
 - Draught (T)
 - Design displacement (Δ) (kg, fresh water)
- Hydrostatics, including water plane area and wetted surface area
- Details of turbulence stimulation
- Details of appendages

3 REFERENCES

- (1) Hughes, G. and Allan, J.F. (1951) Turbulence Stimulation on Ship Models . Trans. S.N.A.M.E., Vol.59, 1951.
- (2) ITTC 1990, 19th International Towing Tank Conference, Vol.1, pg.306.
- (3) ITTC 1999, Model Manufacture, Ship Models, 22nd International Towing Tank Conference, Seoul/Shanghai, Quality Manual, 4.9-02-01-01, Revision 00.
- (4) National Physical Laboratory, (1960), NPL Report SHR 10/59 Revised. Standard Procedure for Resistance and Propulsion Experiments with Ship Models. February, 1960.